

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000910

International filing date: 10 March 2005 (10.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0405571.1  
Filing date: 12 March 2004 (12.03.2004)

Date of receipt at the International Bureau: 18 May 2005 (18.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB05/910



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

26 April 2005



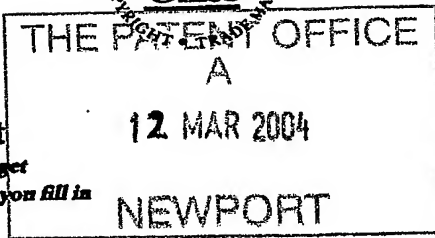

14MAR04 E880393-5 D02833  
P01/7700 0.00-0405571.1 CHEQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

RRS/8773

12 MAR 2004

2. Patent application number

(The Patent Office will fill this part in)

0405571.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Keith David Handy  
Granville House, Granville Terrace,  
Stone, Staffordshire, ST15 8DF.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8827479001

4. Title of the invention

Cleaning Assembly

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Swindell & Pearson

48 Friar Gate  
Derby  
DE1 1GY

Patents ADP number (if you know it)

00001578001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing  
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

No

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

# Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form	0
Description	7
Claim(s)	0
Abstract	0
Drawing(s)	4 + 4

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Swindell & Pearson

Date 11/03/04

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Mr. R.R. Sales - 01332 367051

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Cleaning Assembly

5 This invention relates to a portable cleaning assembly, and particularly but not exclusively such an assembly for cleaning conveyors.

10 Conveyors are used in a wide range of applications including for instance the food industry. In establishments such as bakeries a number of such conveyors may be used, which conveyors may be a wide range of different widths. Such conveyors often have a mesh or interlinked structure and difficulties can be encountered in cleaning such conveyors. If adequate cleaning is not carried out this can result in spoiling of the food products. The use of chemical cleaners which can enhance cleaning, can however result in potential contamination of food products. To provide an adequate cleaning  
15 assembly on each conveyor will, often however prove prohibitively expensive.

20 According to the present invention there is provided a portable cleaning assembly, the assembly including an elongate reciprocal movement providing means, said means including an elongate body and a carriage member movable in a reciprocal manner along a required proportion of the body, a cleaning member mounted on the carriage for cleaning an item, the assembly also including a first engagement member engageable with an item to be cleaned towards a first side of the item, and a second engagement member engageable with the item towards an opposite side thereof, the second  
25 engagement member being adjustably mounted on said elongate body so as to be provided at a required spacing from the first engagement member for a particular item to be cleaned.

30 The second engagement member is preferably slidably mounted on the elongate body, and means may be provided for locking the second engagement member at a required position on the body.

The first and/or second engagement members may include height adjustment means engageable with the item to provide the cleaning member at a required spacing from the item.

5

The reciprocal movement providing means may include a selectively rotatable endless line means located in the body, with the carriage member attached to the line means. The line means may be a belt or chain. The reciprocal movement providing means may include clutch means such that  
10 the carriage member will not move if a resistive force above a predetermined level is encountered.

The cleaning member may include means for projecting fluid onto the item, which fluid may be any of steam, water or other liquid, or air.  
15 Alternatively, the cleaning member may be engageable with the item, and the cleaning member may include any of a rotating or fixed brush, vacuum system, or scraper.

The assembly may include a removable safety cover, and the  
20 assembly may be configured so as to only be operable when the safety cover is in place. The safety cover may be locatable in formations on the first and second engagement members, which formations may be slots.

The proportion of the elongate body along which the carriage moves  
25 may be adjustable, and may be manually adjustable.

One or more sensors may be provided on the engagement body to detect the position of the carriage to cause a required limitation of the movement thereof along the body.  
30

The assembly may be arranged such that a proportion of the elongate body along which the carriage moves is automatically determined by the location of the second engagement member on the elongate body.

5

The invention also provides a portable conveyor cleaning assembly, the assembly being according to any of the preceding nine paragraphs, with the first and second engagement members being locatable on respective side structures of a conveyor.

10

An embodiment of the present invention will now be described by way of example only and with reference to the accompanying drawings, in which:-

Fig. 1 is a diagrammatic side view of a cleaning assembly according to the invention in use in cleaning a first conveyor;

15

Fig. 2 is a similar view to Fig. 1 but with the assembly cleaning a second wider conveyor;

20

Fig. 3 is a diagrammatic end view of the assembly of Figs. 1 and 2; and

Figs. 4 and 5 are respectively plan views of the assembly in use on the first and second conveyors.

25

The drawings show a cleaning assembly 10 in use cleaning either a first conveyor 12 or a second wider conveyor 14. The conveyors 12, 14 each comprise a mesh belt 16 which extends between side structures 18.

30

The assembly 10 comprises a control box 20 including a supply 22, in this instance of steam. An elongate reciprocal movement providing means 24 extends laterally from the control box 20 and includes an elongate rectangular cross-section body 26. Located within the body 26 is an endless belt (not



shown) driven by an appropriate mechanism (not shown) including a clutch configuration which permits the belt to slip if a reactive force above a predetermined level is encountered thereby. A slot (not shown) is provided on the underside of the body 26 to provide access to the belt, and a carriage 28 is mounted to the belt through the slot.

The carriage 28 carries a cleaning member in the form of a manifold 30 with a plurality of downwardly directed jets 32. A supply pipe 34 extends from the manifold 30 and is carried by a flexible conduit 36 in a loop on top of the body 26, to connect to the steam supply 22.

First and second end assemblies 38, 40 are provided. The first assembly 38 is attached to the control box 20. The assembly 38 includes a spaced pair of height adjusters 42 engageable with the respective conveyor side structure 18. Each height adjuster 42 includes an F shape section bracket 44 which locates a threaded thumb wheel 46 between the side limbs of the F, with a foot 48 below the side limbs of the F, mounted on a threaded bar extending through the bracket 44, such that rotation of the thumb wheel 46 raises and lowers the foot 48. Two similar spaced height adjusters 42 are provided on the second end assembly 40. The end assembly 40 is slidably mounted on the elongate body 26 by virtue of a sleeve arrangement 52. Two clamp screws 54 extend in to the sleeve arrangement 52 such that tightening of the screws 54 locks the sleeve arrangement 52, and hence end assembly 40, on the body 26.

A safety guard 56 in the form of a mesh cage is provided which locates in four slots 58, each provided on a respective side of one of the end assemblies 38, 40. The slots 58 enable relative movement between the end assembly 40 and the guard 56, allowing the same guard 56 to be used in different locations. A proximity safety switch 60 is provided on the fixed end assembly 38 spaced from a one of the slots 58. The safety switch 60 is

connected to the control box 20 to prevent operation of the assembly 10 if the safety guard 46 is not detected as being in position.

5           In use with the clamp screws 54 loosened, the end assembly 40 can be slid to an appropriate position on the body 26 to fit on the side structure 18 of a particular conveyor. Once the height adjusters 42 are located in correct positions on the respective side structures 18, the clamp screws 54 can be tightened to provide a required operating width for the assembly 10. The height adjusters 42 can then be adjusted by manipulating the respective thumb wheels 46 to provide a required height of the jets 32 above the mesh conveyor 16. Once a correct height has been determined, using the control box 20 the amount of reciprocal movement of the carriage 28 and hence jets 32 can be set to provide full cleaning of the mesh 16. The amount of reciprocal movement of the jets 32 is shown by the line 62 in Figs. 1 and 4.

When required the assembly 10 can readily be moved for use with a different conveyor such as the wider conveyor 14 as shown in Figs. 2 and 5. For use on the conveyor 14, the safety guard 56 is lifted off, and following loosening of the screws 54 the end assembly 40 will be moved to the left as shown in the drawings. Once the assembly 10 is correctly fitted on to the conveyor 14, the safety guard 56 is replaced so as to locate in the slots 58 irrespective of the position of the end assembly 40. The control box 20 is used to provide a greater extent of reciprocal movement of the jets 32, as shown by the line 64.

If required extra height adjustment can be obtained by altering the mounting of the height adjusters 42 on the end assemblies 38, 40. Fig. 3 illustrates the height adjusters 42 mounted to a middle pair of mounting holes 66, but alternative lower and higher mounting holes 68 are illustrated. Such holes may be usable for example where there is a particular recess on a conveyor.

There is thus described a portable cleaning assembly 10 usable on a wide range of different size conveyors. This means that one or more such assemblies could be used in a particular location to clean a wide range of different size conveyors, thus making it economically practical to clean a number of different size conveyors, whilst only requiring one or more cleaning assemblies. The same safety guard is usable with different size conveyors. The height adjustment in the assembly 10 permits thorough cleaning of conveyors, even where these have a somewhat different configuration. The assembly has a relatively straightforward configuration and can thus be inexpensively and robustly manufactured for regular low maintenance operation in a wide range of locations.

Various modifications may be made without departing from the scope of the invention. For example, a different cleaning system may be used, and rather than steam, a liquid such as water or a chemical cleaner may be used, or air could also be used. It may be that a contact cleaning process is used. For instance, a rotating or fixed brush could be used, or alternatively a vacuum system, scraper or other arrangement could be provided.

Rather than a manual adjustment of the reciprocal movement, sensors could be provided such that the amount of linear movement is automatically determined by the spacing between the end assemblies. The movement of the cleaning member in use need not be in a reciprocal manner, and the cleaning member could operate only, or particularly, at specific parts of a conveyor or other item to be cleaned. The invention is usable in cleaning arrangements for a wide range of applications other than conveyors.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or

shown in the drawings whether or not particular emphasis has been placed thereon.



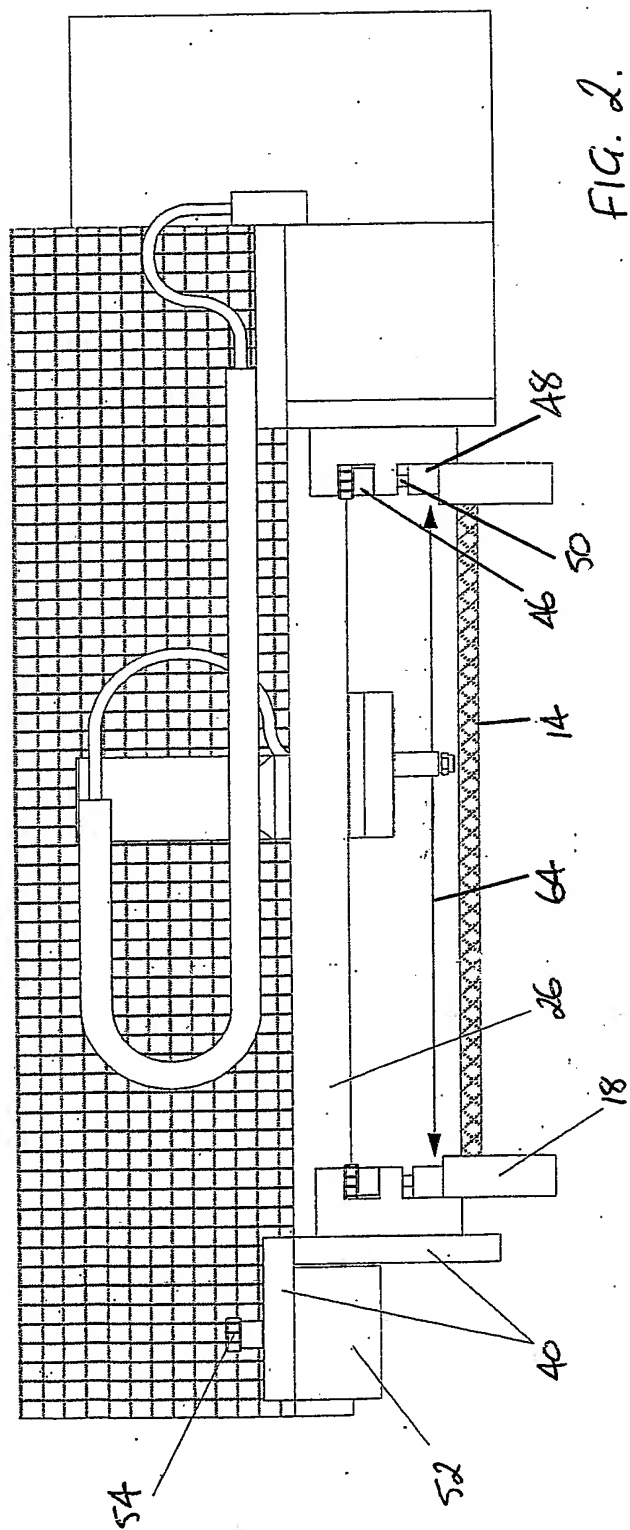


FIG. 2.



FIG. 3


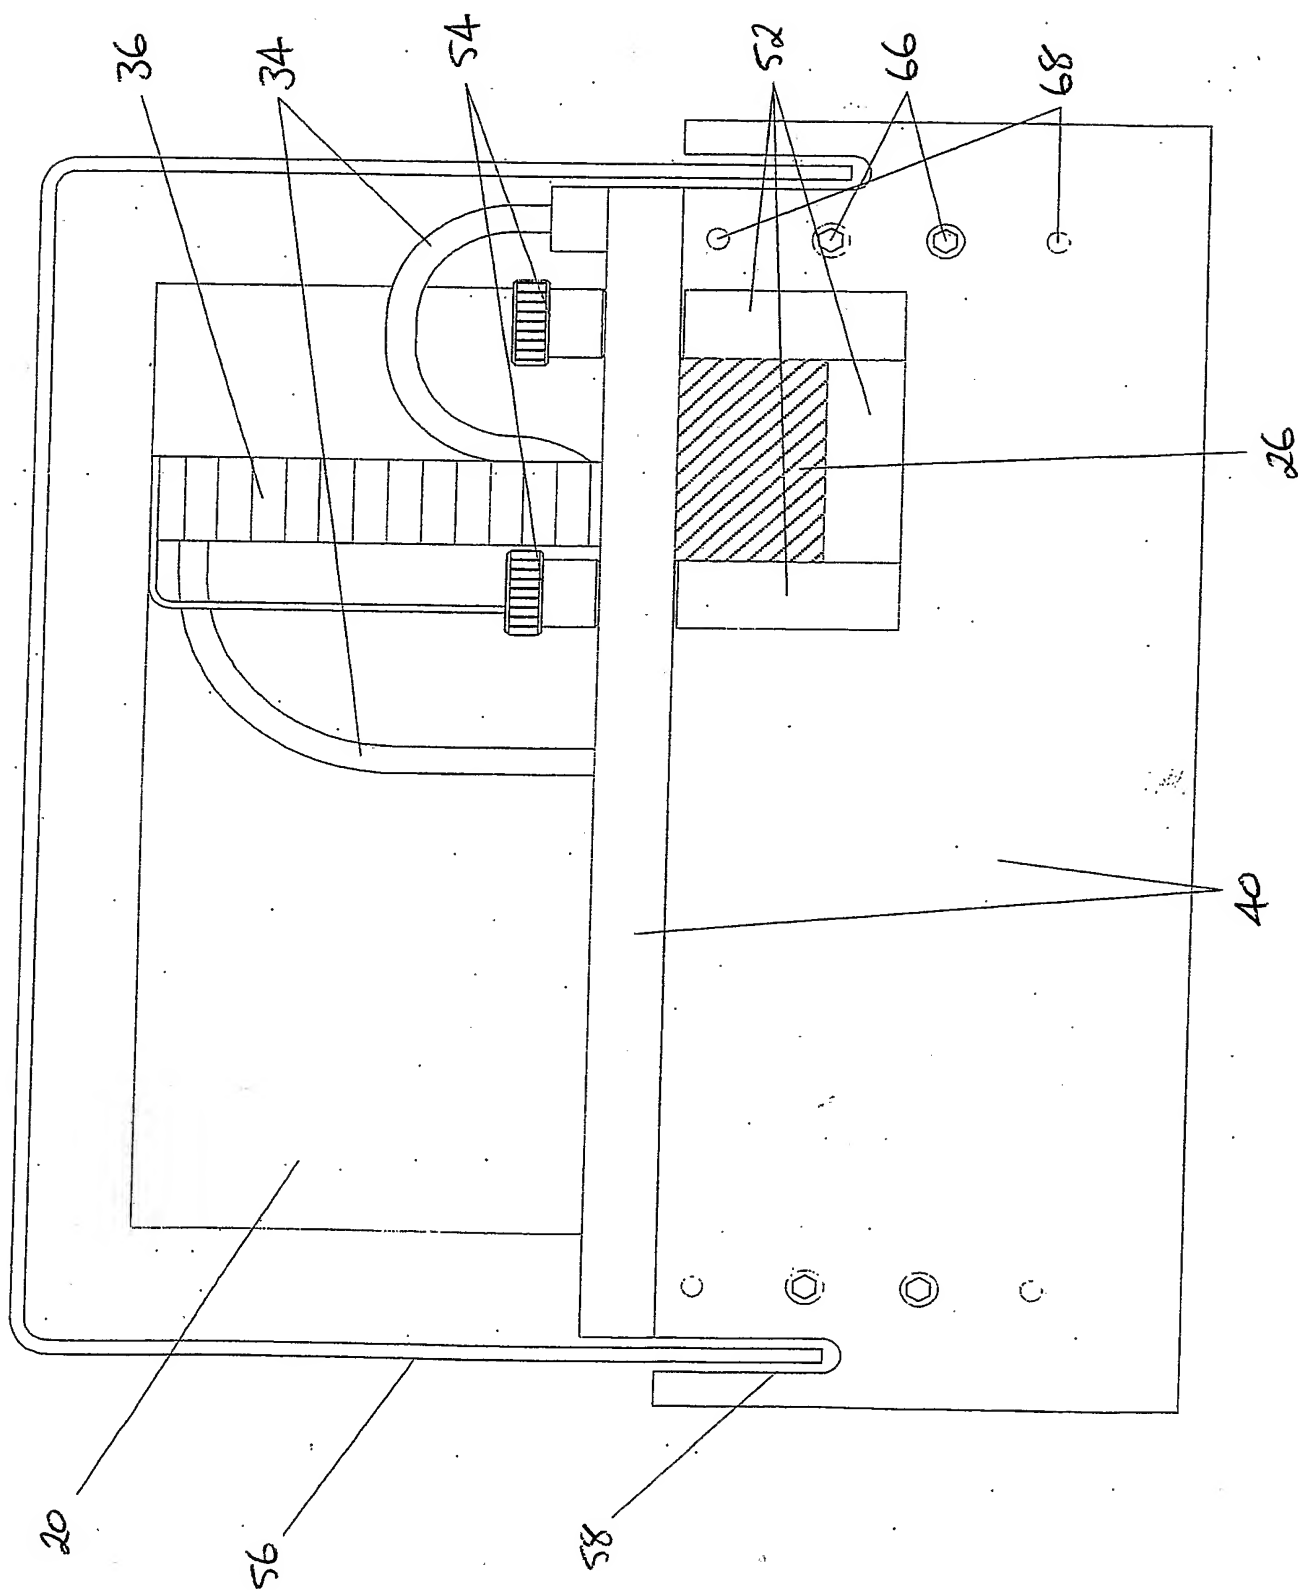






FIG. 4.



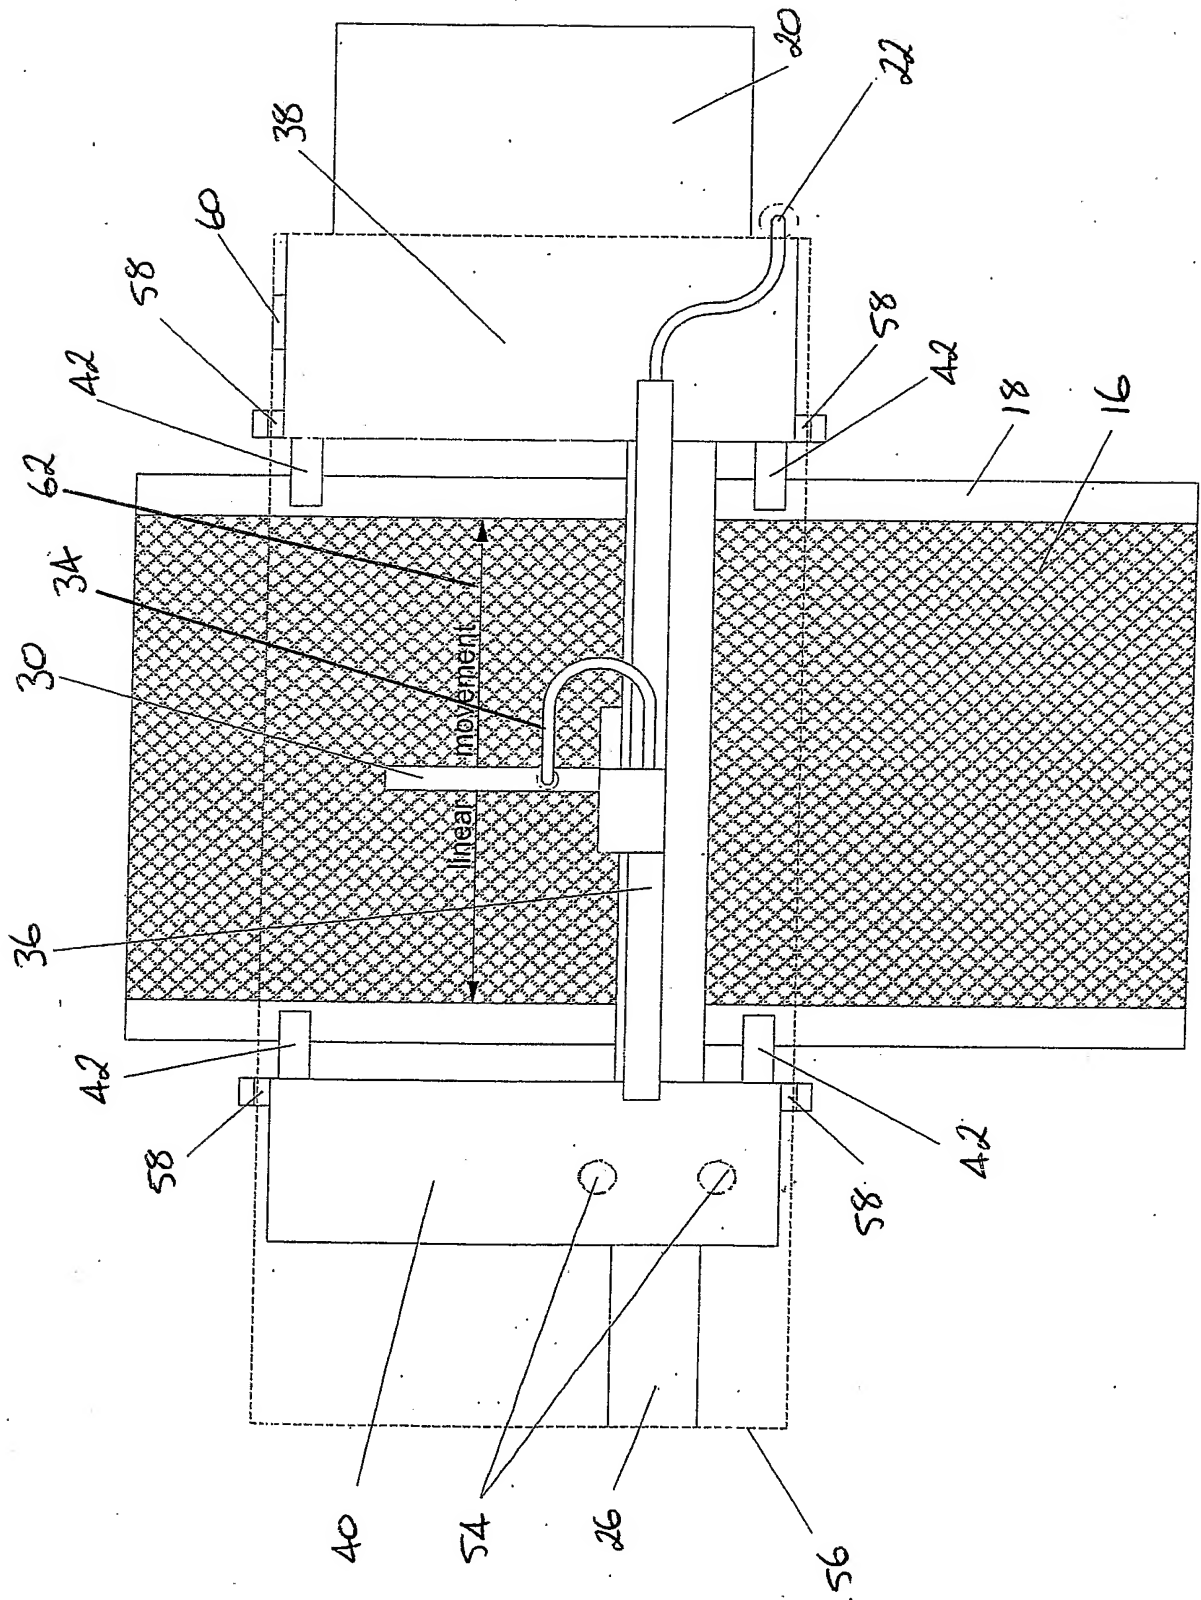

[illegible]